


FLOUT® NUMBERING SYSTEM

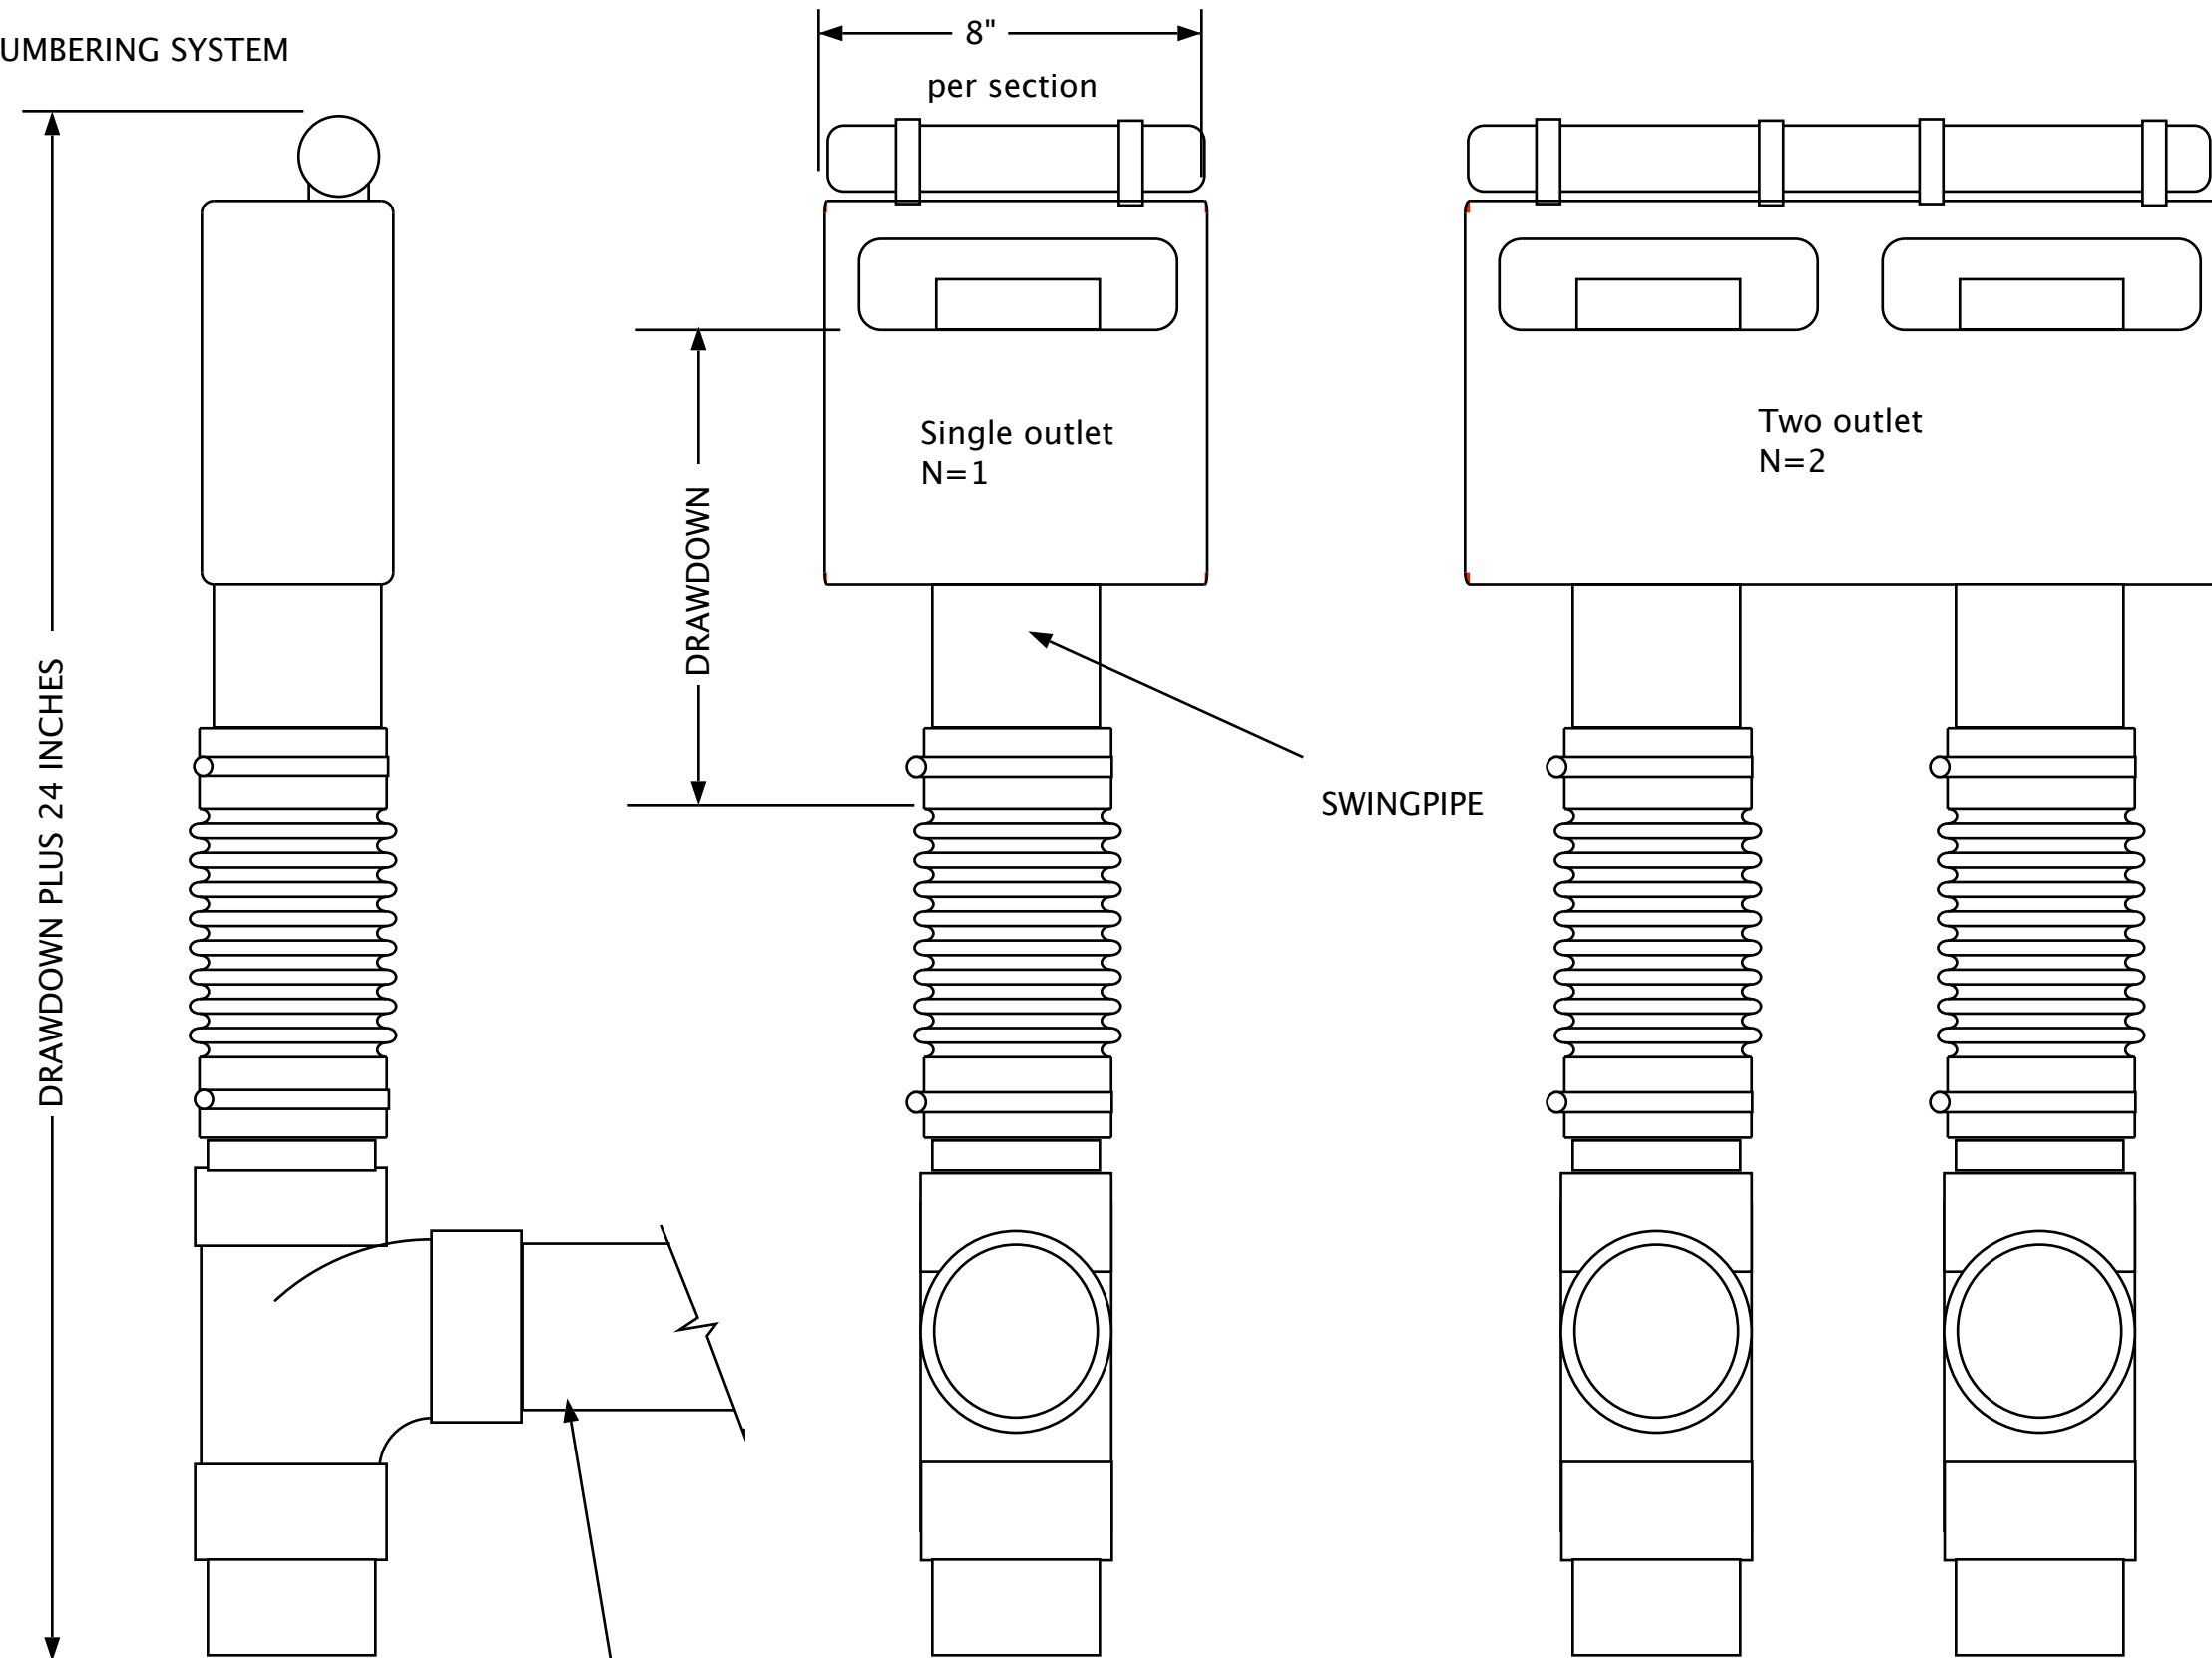

FLOUT® TYPICAL MODEL

FL-(DD) (SD) (N)- (A)

where FL = Flout®

DD = DRAWDOWN IN INCHES, 0 leading\*

SD= swingpipe diameter (2,3,or4 inches)

N= NUMBER OF OUTLETS (1,2,3,4,5,6....)

A= TANK WALL ARRANGEMENT...  
 X-No vent or wall fitting supplied,  
 0- Vent only, no wall fitting  
 4- Vent with wall fitting for 4" sdr 35 socket. Wall fitting designed to pre-cast into 3" wall. Outlet arrangements with different pipe types, fit-up or fabricated manifolds, etc. are available. Inquire.

\*DD LESS THAN 10" PRECEDED BY A ZERO. Ex: 8" DD = 08  
 Flout® body with DD followed by A is designed for use with ALTERNATOR system, DD followed by Q is designed for use with the CueBox™ sequencer system.

Type examples:

A 17" drawdown Flout® with one 3" outlet, vent, and fitting to cast into concrete wall to accept 4" sdr 35 pipe FL-1731-4

An 8" drawdown Flout® with 2- 3" outlets, 2 vents, and no wall fittings (field installation) FL-0832-0

RISSY PLASTICS, LLC ,350 CEDAR LANE, TORRINGTON, CT 06790 USA,  
 1.860.482.1645, rissyplastics.com, tanxrus@aol.com  
 US PATENT 5290434 DRAWING NO: FLTYP1035X ©2008 JAMES RICHARD